

## Technical Information

### Schöck Isokorb® T Type S

Schöck North America

[www.schock-na.com](http://www.schock-na.com)


+1 855 572 4625

*This design methodology has been approved under the German technical authority DIBt as National Technical Approval No. Z-14.4-518. It has been reviewed based on the American National Standard ANSI/AISC 360-16 "Specification for Structural Steel buildings" published by the American National Standards Institute (ANSI) and the American Institute of Steel Construction (AISC).*


## Schöck Isokorb® T Type S Product Description

The Schöck Isokorb® T Type S steel connection module is used to resist compression, tension and shear forces. Modules acting together in tandem can resist moment forces for a cantilevered beam connection.

This product comes in four variants: S-N-D16, S-V-D16, S-N-D22 and S-V-D22. The 16 and 22 refer to the size of the stainless-steel bolts provided in each product, M16 and M22 respectively. N and V refer to the force the module is able to transfer: N for the transfer of axial forces only and V for the transfer of axial and shear forces through a stainless-steel HSS that provides rigidity. Two end plates make up the remainder of the product structure. The structural portion of the module is surrounded by a Neopor®\* insulation block to complete the product.

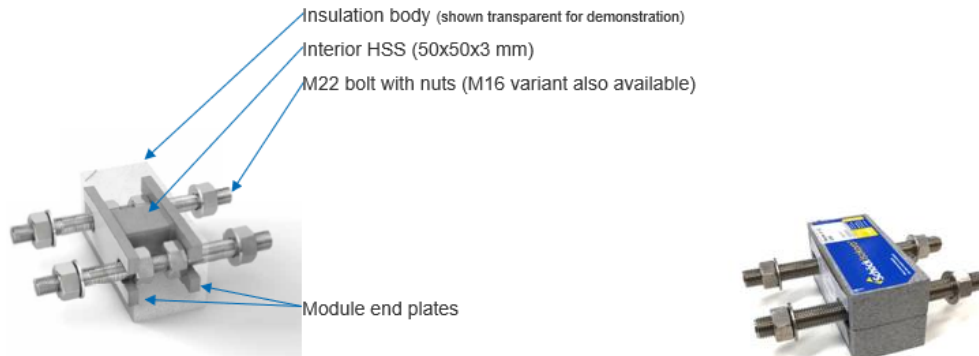

## Schöck Isokorb® T Type S-N-D16 and Type S-V-D16 Details and Dimensions

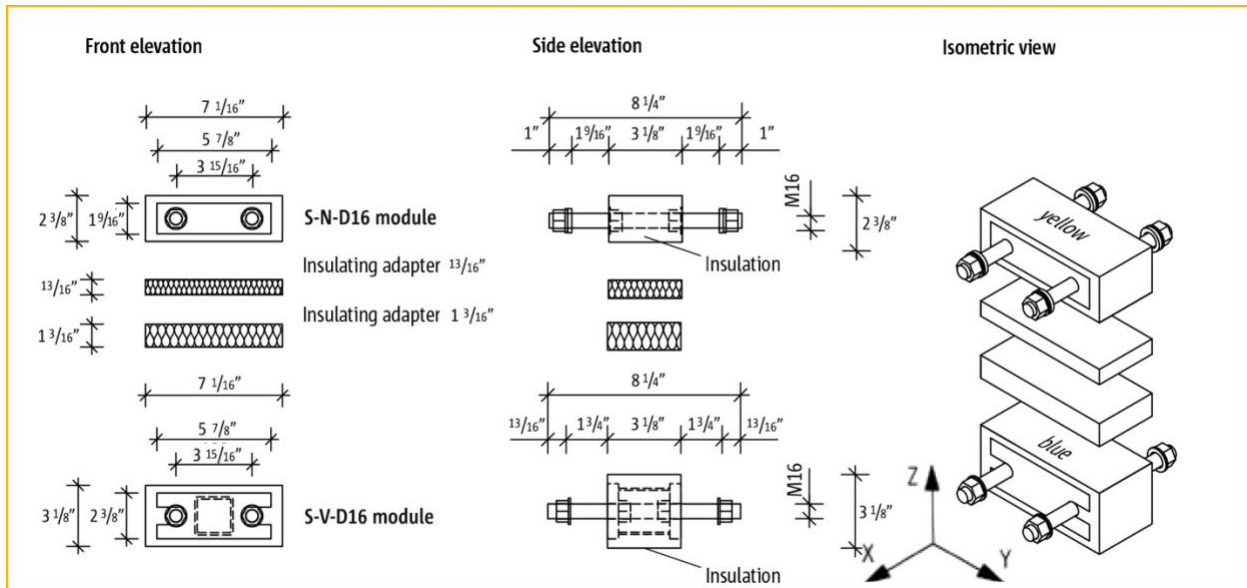

\*Neopor® is a registered trademark of BASF Corporation.

### Schöck Isokorb® T Type S-N-D22 and Type S-V-D22 Details and Dimensions

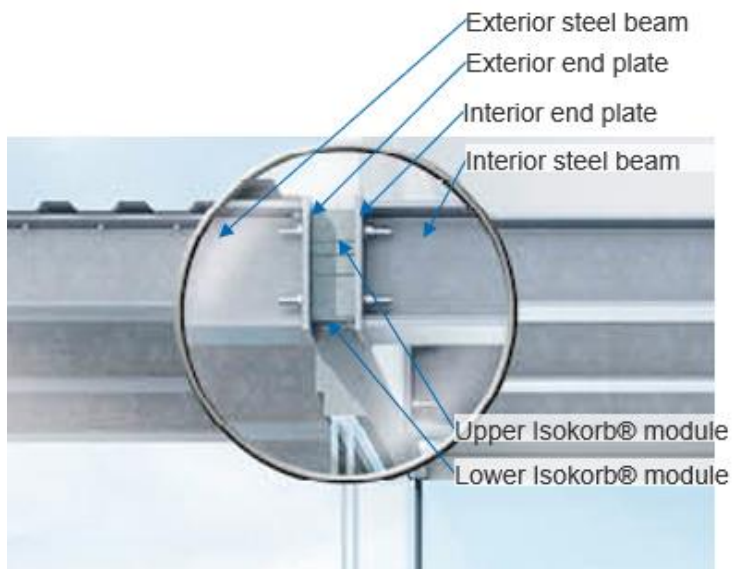
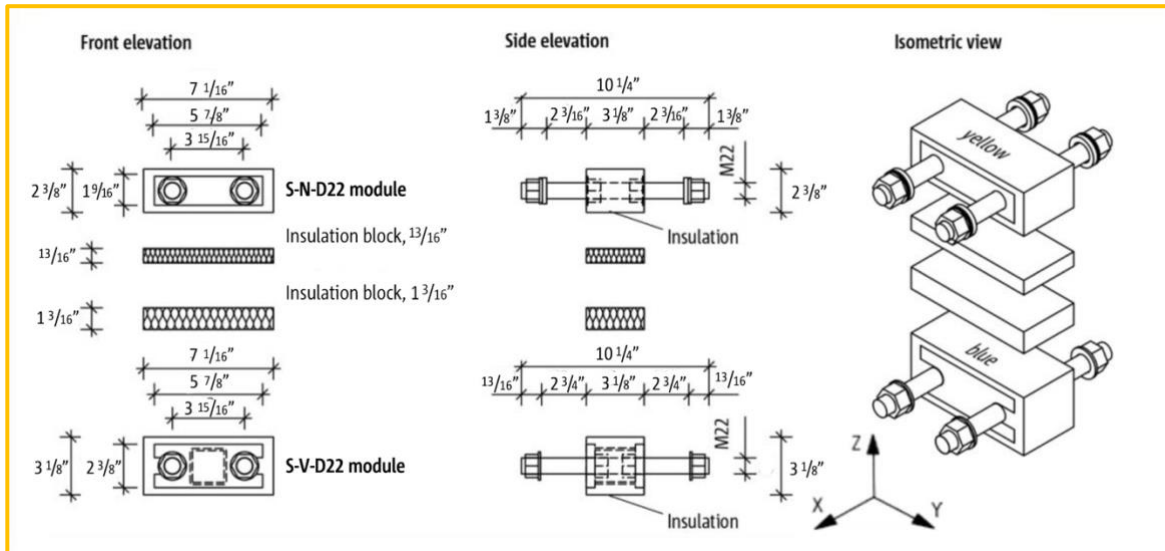


Figure 3. Description of Thermal Break

## Structural Material Specifications

Item	EU Class	Nominal Strength	Material No.	Comparable Alloy
M16 bolts	70	116 ksi	1.4462	ASTM A240 Duplex 2507
M22 bolts	70	116 ksi	1.4462	ASTM A240 Duplex 2507
HSS (50x50x3mm)	S355	80 ksi	1.4571	ASTM A240 Grade 316 Ti
Module end plates (t=12mm)	S235	72 ksi	1.4401	ASTM A240 Grade 316

Table 1. Material Properties

### Notes on Capacity Calculations:

The Schöck Isokorb® steel connection modules are for static loading only with no torsion forces passing through the connection. Rigid end plates are assumed for the beam at the thermal break connection.

Calculation of shear resistance depends on the compression/tension in the module bolts. There are three possible conditions:

- Bolts in compression zone: both bolts are in compression
- Bolts in compression/tension combination zone: one bolt is in compression and the other is in tension
- Bolts in tension zone: both bolts are in tension

The design rules for the allocation of shear demand to connection modules have been developed through physical trials and testing. The allocation of shear demand to modules may be distributed according to the maximum shear strength of each module provided the following conditions are met:

- The applied shear forces  $V_{u,y}$  and  $V_{u,z}$  are allocated to all modules proportionally (figure 5), so the following holds for all modules:
 
$$V_{u,i,y} / V_{u,i,z} = \text{const.} \quad i = 1, 2, \dots \text{ number of modules}$$
- The distribution of shear demand is symmetrical about the z-axis.
- The sum of the shear force components of the individual modules corresponds to the total shear force acting on the connections.

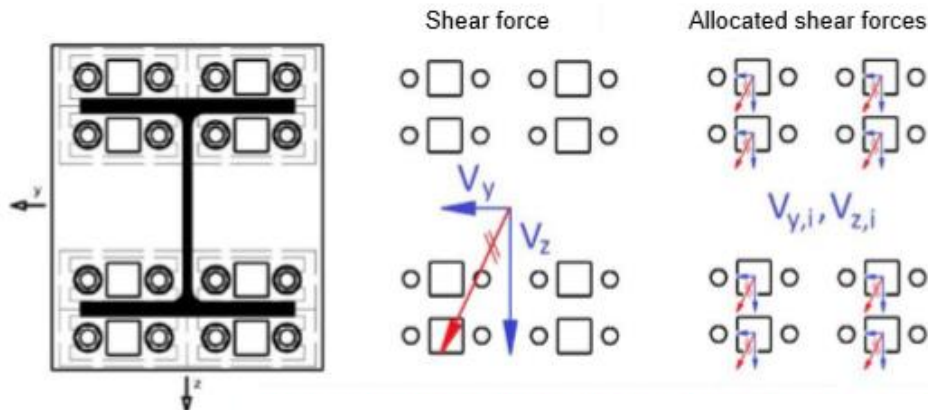


Figure 4. Allocation of Shear Demand to Modules

**Notes on nomenclature:**

Subscript Ed stands for factored loading imposed on the connection and the subscript Rd stands for the resistance provided by the module or bolts. The table below describes the European terms provided in this manual in their equivalent American form:

Z-14.4-518	ANSI/AISC 360-16	Description
$Z_{Ed}$	$T_u$	Factored tension force in bolt under consideration
$D_{Ed}$	$C_u$	Factored compression force in bolt under consideration
$C_{ZD,Rd}$	$T_u$	Factored tension force in element under consideration
$C_{VZ,Rd}$	$\phi V_{n,T}$	Max shear resistance when module is in tension
$C_{VD,Rd}$	$\phi V_{n,C}$	Max shear resistance when module is in compression
$V_{y,l,Ed}$	$V_{i,u,y}$	Factored horizontal shear in module under consideration
$V_{z,l,Ed}$	$V_{i,u,z}$	Factored vertical shear in module under consideration
$V_{z,Rd}$	$\phi V_{n,z}$	Vertical shear resistance of module
$V_{y,Rd}$	$\phi V_{n,y}$	Horizontal shear resistance of module
$M_{z,Ed}$	$M_{u,z}$	Factored moments about z-axis
$M_{z,Rd}$	$\phi M_{n,z}$	Factored resistance about z-axis
$N_{Ed}$	$P_u$	Factored axial forces
$N_{GS,Ed}$	$P_{u,bolt}$	Factored axial forces in bolts determined by statics
$N_{Rd}$	$\phi P_{n,bolt}$	Factored axial resistance of bolt

Table 2. Nomenclature

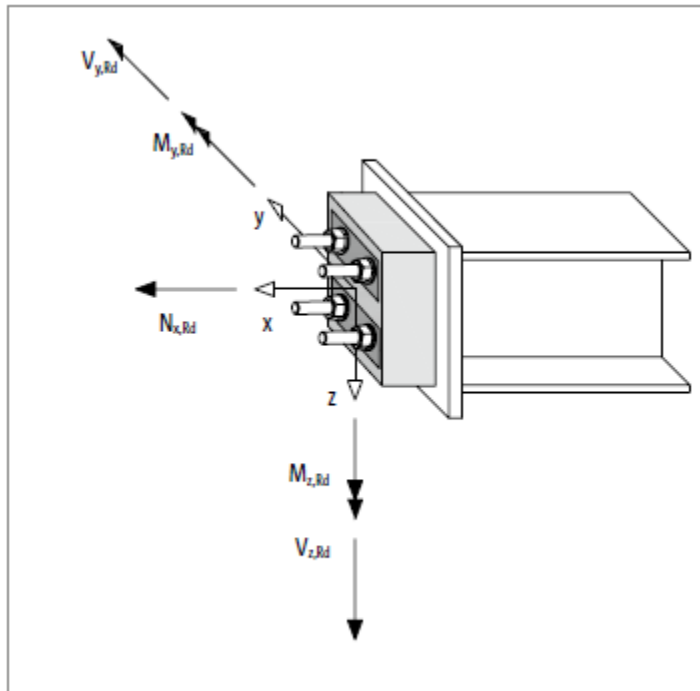


Figure 5. Sign Convention for Structural System

## Overview: Structural Cases

**Case 1.** Supported Steel Connection with Vertical Shear  $\pm V_z$ , Horizontal Shear  $\pm V_y$  and Axial Forces  $\pm P_x$  only, with one connecting module. (page 6)

**Case 2.** Cantilevered Steel Connection with Vertical Shear  $\pm V_z$ , Horizontal Shear  $\pm V_y$  Axial Forces  $\pm P_x$ , and Moments in the vertical and horizontal planes  $\pm M_y$  and  $\pm M_z$  with two connecting modules in tandem. (page 7)

**Case 3.** Cantilevered Steel Connection with Vertical Shear  $\pm V_z$ , Horizontal Shear  $\pm V_y$  Axial Forces  $\pm P_x$ , and Moments in the vertical and horizontal planes  $\pm M_y$  and  $\pm M_z$  with multiple connecting modules. (page 9)

**Case 1.** Supported Steel Connection with Vertical Shear  $\pm V_z$ , Horizontal Shear  $\pm V_y$  and Axial Forces  $\pm P_x$  only, with one connecting module. Only S-V-D16 and S-V-D22 can be used in such application.

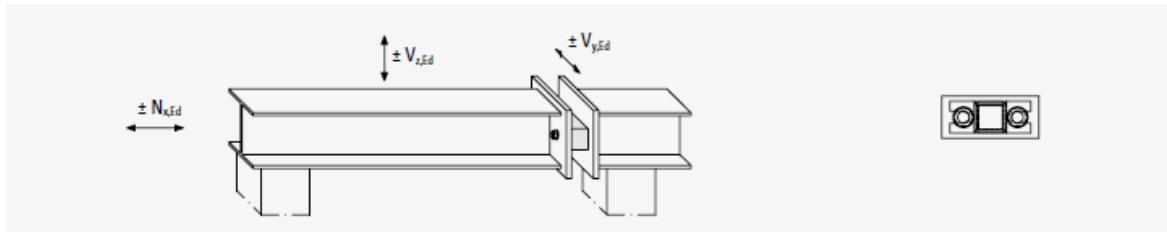


Figure 6. Case 1: Supported Steel Connection

Schöck Isokorb® Module	S-V-D16		S-V-D22			
Capacity calculation per:	$\phi P_n$ [kip/Module]					
Module	$\pm 26.3$		$\pm 50.7$			
<b>Shear Resistance for Compression Case</b>						
Module	$\phi V_{n,z}$ [kip/Module]					
	for:	$0 \leq  V_{u,y}  \leq 1.3$	$\pm 6.7$	for:	$0 \leq  V_{u,y}  \leq 1.3$	$\pm 8.1$
		$1.3 \leq  V_{u,y}  \leq 3.4$	$\pm (6.7 -  V_{u,y} )$		$1.3 \leq  V_{u,y}  \leq 4.0$	$\pm (8.1 -  V_{u,y} )$
	$\phi V_{n,y}$ [kip/Module]					
	$\pm \min \{3.4; (6.7 -  V_{u,z} )\}$		$\pm \min \{4.0; (8.1 -  V_{u,z} )\}$			
<b>Shear Resistance for Tension Case</b>						
Module	$\phi V_{n,z}$ [kip/Module]					
	for:	$0 \leq P_{u,x} \leq 6.0$	$\pm (6.7 -  V_{u,y} )$	for:	$0 \leq P_{u,x} \leq 26.4$	$\pm (8.1 -  V_{u,y} )$
		$6.0 \leq P_{u,x} \leq 26.3$	$\pm (\frac{1}{3} * (26.3 - P_{u,x}) -  V_{u,y} )$		$26.4 \leq P_{u,x} \leq 50.7$	$\pm (\frac{1}{3} * (50.7 - P_{u,x}) -  V_{u,y} )$
	$\phi V_{n,y}$ [kip/Module]					
	for:	$0 \leq P_{u,x} \leq 6.0$	$\pm \min \{3.4; (6.7 -  V_{u,z} )\}$	for:	$0 \leq P_{u,x} \leq 26.4$	$\pm \min \{4.0; (8.1 -  V_{u,z} )\}$
		$6.0 \leq P_{u,x} \leq 26.3$	$\pm \min \{3.4; \frac{1}{3} * (26.3 - P_{u,x}) -  V_{u,z} \}$		$26.4 \leq P_{u,x} \leq 50.7$	$\pm \min \{4.0; \frac{1}{3} * (50.7 - P_{u,x}) -  V_{u,z} \}$

Table 3. Case 1 Axial and Shear Capacity

**Case 2.** Cantilevered Steel Connection with Vertical Shear  $\pm V_z$ , Horizontal Shear  $\pm V_y$  Axial Forces  $\pm P_x$ , and Moments in the vertical and horizontal planes  $\pm M_y$  and  $\pm M_z$  with two connecting modules in tandem.

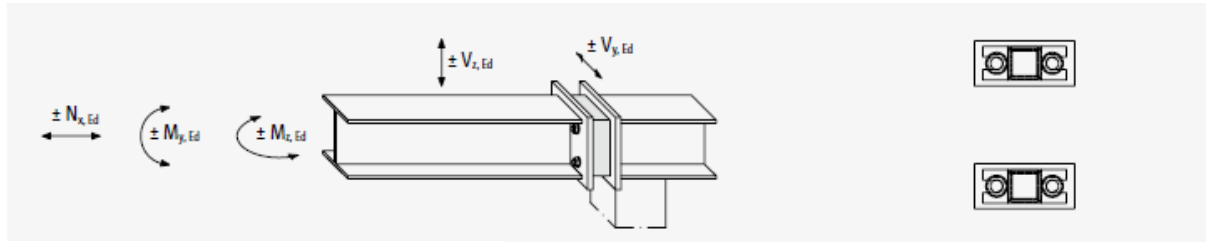


Figure 7. Case 2: Simple Cantilevered Steel

### Axial resistance per bolt

Schöck Isokorb® Module	S-D16	S-D22
Axial Capacity per:	$\phi P_{n, \text{bolt}}$ [kip/Bolt]	
Bolt	$\pm 13.1$	$\pm 25.3$
	$\phi P_{n, \text{bolt}, M_z}$ [kip/Bolt]	
Bolt	$\pm 6.6$	$\pm 12.7$

Table 4. Case 2 Axial Capacity




Figure 8. Case 2: Module Lever Arms

**Note:** The tension/compression capacity of the bolt is reduced under moment about the z-axis to ensure that adequate shear strength in the y-direction is obtained.

Axial forces in the bolts can be combined with the lever arm to resist moment forces in the connection.  $+\phi P_{n, \text{bolt}}$  is considered a bolt in tension and  $-\phi P_{n, \text{bolt}}$  is considered a bolt in compression.

### Force Components:

- Axial force  $P_{u,x}$   $P_{1,u,\text{bolt}} = P_{u,x} / 4$
- Moment about y-axis  $M_{u,y}$   $P_{2,u,\text{bolt}} = M_{u,y} / (4 * z)$
- Moment about z-axis  $M_{u,z}$   $P_{3,u,\text{bolt}} = M_{u,z} / (4 * y)$

Check required of conditions of bi-axial moment and axial force combinations:

- Condition 1: Bi-axial moment check combined with axial force:  

$$| P_{1,u,\text{bolt}} + P_{2,u,\text{bolt}} + P_{3,u,\text{bolt}} | \leq | \phi P_{n, \text{bolt}} | \text{ [kip/Bolt]}$$
 The maximum or minimum loaded bolt is the governing case
- Condition 2: Axial force combined with minor (z-axis) moment:  

$$| P_{1,u,\text{bolt}} + P_{3,u,\text{bolt}} | \leq | \phi P_{n, \text{bolt}, M_z} | \text{ [kip/Bolt]}$$



### Shear resistance per module and per connection

Schöck Isokorb® Module	S-V-D16	S-V-D22				
Capacity per:	Shear Resistance for Compression Zone					
Module	$\phi V_{i,n,z}$ [kip/Module]					
	$\pm(10.3 -  V_{i,u,y} )$	$\pm(11.2 -  V_{i,u,y} )$				
	$\phi V_{1,n,y}$ [kip/Module]					
	$\pm \min \{5.2; (10.3 -  V_{i,u,z} )\}$	$\pm \min \{5.6; (11.2 -  V_{i,u,z} )\}$				
	Shear Resistance for Tension/Compression Zone and Tension Zone					
Module	$\phi V_{1,n,z}$ [kip/Module]					
	for:	$0 \leq P_{i,u,bolt} \leq 3.0$	$\pm(6.7 -  V_{i,u,y} )$	for:	$0 \leq P_{i,u,bolt} \leq 13.2$	$\pm(8.1 -  V_{i,u,y} )$
		$3.0 \leq P_{i,u,bolt} \leq 13.1$	$\pm(\frac{2}{3} * (13.1 - P_{i,u,bolt}) -  V_{1,u,y} )$		$13.2 \leq P_{i,u,bolt} \leq 25.3$	$\pm(\frac{2}{3} * (25.3 - P_{i,u,bolt}) -  V_{1,u,y} )$
	$\phi V_{1,n,y}$ [kip/Module]					
	for:	$0 \leq P_{i,u,bolt} \leq 3.0$	$\pm \min \{5.2; \{6.7 -  V_{i,u,z} \}\}$	for:	$0 \leq P_{i,u,bolt} \leq 13.2$	$\pm \min \{5.6; \{8.1 -  V_{i,u,z} \}\}$
		$3.0 \leq P_{i,u,bolt} \leq 13.1$	$\pm \min \{5.2; (\frac{2}{3} * (13.1 - P_{i,u,bolt}) -  V_{i,u,z} \}\}$		$13.2 \leq P_{i,u,bolt} \leq 25.3$	$\pm \min \{5.6; (\frac{2}{3} * (25.3 - P_{i,u,bolt}) -  V_{i,u,z} \}\}$

Table 5. Case 2 Shear Capacity (S-N-D16 and S-N-D22 do not provide shear strength)

#### Notes:

Determination of axial forces  $P_{i,u,bolt}$  acting on each bolt:

$$P_{i,u,bolt} = P_{u,x} / 4 \pm |M_{u,y}| / (2 * z) \pm |M_{u,z}| / (2 * y)$$

Determination of shear forces resisted per module is dependent on axial loading of the bolts.

For loading in:

- Compression: Both bolts in compression
- Compression and tension combined: One bolt in compression the other in tension
- Tension: Both bolts in tension

In each loaded area (compression, compression/tension, and tension) the maximum positive axial force  $P_{i,u,bolt}$  must be used.

$\phi V_{i,n,z}$ : Shear resistance in the z-direction for a single module, i, depends on the axial force, +  $P_{i,u,bolt}$ , in that module, i.

$\phi V_{i,n,y}$ : Shear resistance in the y-direction for a single module, i, depends on the axial force, +  $P_{i,u,bolt}$ , in that module, i.

#### Conditions:

- The ratio of the vertical shear force  $V_{u,z}$  and horizontal shear force  $V_{u,y}$  for a single module is constant.
- $V_{u,z} / V_{u,x} = \phi V_{i,n,z} / \phi V_{i,n,y} = \phi V_{n,z} / \phi V_{n,y}$
- If the condition is not met, a reduction must be made to  $V_{u,z}$  or  $V_{u,x}$  in order to keep the ratio constant in the module.
- $V_{u,z} \leq \sum \phi V_{i,n,z}$
- $V_{u,y} \leq \sum \phi V_{i,n,y}$

**Case 3.** Cantilevered Steel Connection with Vertical Shear  $\pm V_z$ , Horizontal Shear  $\pm V_y$  Axial Forces  $\pm P_x$ , and Moments in the vertical and horizontal planes  $\pm M_y$  and  $\pm M_z$  with multiple connecting modules.

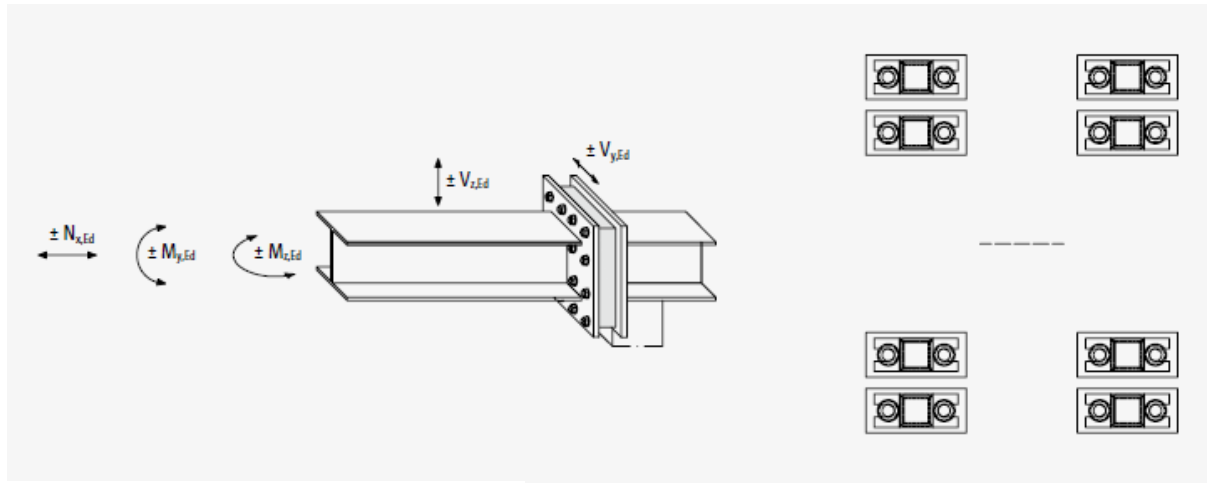


Figure 9. Case 3: Complex Cantilevered Steel

**Axial resistance per bolt**

Schöck Isokorb® Module	S-D16	S-D22
Axial Capacity per:	$\phi P_{n, \text{bolt}}$ [kip/Bolt]	
Bolt	$\pm 13.1$	$\pm 25.3$
	$\phi P_{n, \text{bolt}, Mz}$ [kip/Bolt]	
Bolt	$\pm 6.6$	$\pm 12.7$

Table 6. Case 3 Axial Capacity




Figure 10. Case 3: Module Lever Arms

Axial forces in the bolts can be combined with the lever arm to resist moment forces in the connection.  $+\phi P_{n, \text{bolt}}$  is considered a bolt in tension and  $-\phi P_{n, \text{bolt}}$  is considered a bolt in compression.

Numbering the multiple bolts:

- m: Number of bolts per connection in the z-direction
- n: Number of bolts per connection in the y-direction

Force Components:

- Axial force  $P_{u,x}$   $P_{1,u,\text{bolt}} = P_{u,x} / (m \cdot n)$
- Moment about y-axis  $M_{u,y}$   $P_{2,u,\text{bolt}} = \pm M_{u,y} / (2 \cdot m \cdot z_2 + 2 \cdot m \cdot z_1 / z_2 \cdot z_1)$
- Moment about z-axis  $M_{u,z}$   $P_{3,u,\text{bolt}} = \pm M_{u,z} / (2 \cdot n \cdot y_2 + 2 \cdot n \cdot y_1 / y_2 \cdot y_1)$

Check required conditions of bi-axial moment and axial force combinations:

- Condition 1: Bi-axial moment check combined with axial force:  
 $|P_{1,u,\text{bolt}} + P_{2,u,\text{bolt}} + P_{3,u,\text{bolt}}| \leq |\phi P_{n,\text{bolt}}|$  [kip/Bolt]  
 The maximum or minimum loaded bolt is the governing case
- Condition 2: Axial force combined with minor (z-axis) moment:  
 $|P_{1,u,\text{bolt}} + P_{3,u,\text{bolt}}| \leq |\phi P_{n,\text{bolt}, Mz}|$  [kip/Bolt]

## Shear resistance per module and per connection

Schöck Isokorb® Module	S-V-D16		S-V-D22			
Capacity per:	Shear Resistance for Compression Zone					
Module	$\phi V_{i,n,z}$ [kip/Module]					
	$\pm(10.3 -  V_{i,u,y} )$		$\pm(11.2 -  V_{i,u,y} )$			
	$\phi V_{i,n,y}$ [kip/Module]					
	$\pm\min\{5.2; (10.3 -  V_{i,u,z} )\}$		$\pm\min\{5.6; (11.2 -  V_{i,u,z} )\}$			
	Shear Resistance for Tension/Compression Zone and Tension Zone					
Module	$\phi V_{i,n,z}$ [kip/Module]					
	for:	$0 \leq P_{i,u,bolt} \leq 3.0$	$\pm(6.7 -  V_{i,u,y} )$	for:	$0 \leq P_{i,u,bolt} \leq 13.2$	$\pm(8.1 -  V_{i,u,y} )$
		$3.0 \leq P_{i,u,bolt} \leq 13.1$	$\pm(\frac{2}{3} * (13.1 - P_{i,u,bolt}) -  V_{i,u,y} )$		$13.2 \leq P_{i,u,bolt} \leq 25.3$	$\pm(\frac{2}{3} * (25.3 - P_{i,u,bolt}) -  V_{i,u,y} )$
	$\phi V_{i,n,y}$ [kip/Module]					
	for:	$0 \leq P_{i,u,bolt} \leq 3.0$	$\pm\min\{5.2; \{6.7 -  V_{i,u,z} \}\}$	for:	$0 \leq P_{i,u,bolt} \leq 13.2$	$\pm\min\{5.6; \{8.1 -  V_{i,u,z} \}\}$
		$3.0 \leq P_{i,u,bolt} \leq 13.1$	$\pm\min\{5.2; (\frac{2}{3} * (13.1 - P_{i,u,bolt}) -  V_{i,u,z} \)\}$		$13.2 \leq P_{i,u,bolt} \leq 25.3$	$\pm\min\{5.6; (\frac{2}{3} * (25.3 - P_{i,u,bolt}) -  V_{i,u,z} \)\}$

Table 7. Case 3 Shear Capacity (S-N-D16 and S-N-D22 do not provide shear strength)

### Notes:

Determination of axial forces  $P_{i,u,bolt}$  acting on each bolt:

$$P_{i,u,bolt} = P_{u,x} / (m * n) \pm |M_{u,y}| / (2 * m * z_2 + 2 * m * z_1 / z_2 * z_1) \pm |M_{u,z}| / (2 * n * y_2 + 2 * n * y_1 / y_2 * y_1)$$

Determination of shear forces resisted per module is dependent on axial loading of the bolts.

For loading in:

- Compression: Both bolts in compression
- Compression and tension combined: One bolt in compression the other in tension
- Tension: Both bolts in tension

In each loaded area (compression, compression/tension, and tension) the maximum positive axial force  $P_{i,u,bolt}$  must be used.

$\phi V_{i,n,z}$ : Shear resistance in the z-direction for a single module, i, depends on the axial force, +  $P_{i,u,bolt}$ , in that module, i.

$\phi V_{i,n,y}$ : Shear resistance in the y-direction for a single module, i, depends on the axial force, +  $P_{i,u,bolt}$ , in that module, i.

### Conditions:

- The ratio of the vertical shear force  $V_{u,z}$  and horizontal shear force  $V_{u,y}$  for a single module is constant.
- $V_{u,z} / V_{u,x} = \phi V_{i,n,z} / \phi V_{i,n,y} = \phi V_{n,z} / \phi V_{n,y}$
- If the condition is not met, a reduction must be made to  $V_{u,z}$  or  $V_{u,x}$  in order to keep the ratio constant in the module.
- $V_{u,z} \leq \sum \phi V_{i,n,z}$
- $V_{u,y} \leq \sum \phi V_{i,n,y}$

## Deflections

### Deflection of Schöck Isokorb® connection due to axial forces, $A_{u,x}$

Tension zone:  $\Delta l_T = \left| + P_{u,x} \right| * 1/k_T$   
 Compression zone:  $\Delta l_C = \left| - P_{u,x} \right| * 1/k_C$   
 Stiffness constant in tension:  $k_T$   
 Stiffness constant in compression:  $k_C$

Schöck Isokorb® Module		S-D16	S-D22
Stiffness constant		K [kip/in]	
For:	Area		
Module	Tension	3379	4966
Module	Compression	14275	19690

Table 8. Stiffness Constants

### Deflection of Schöck Isokorb® connection due to moment forces, $M_{u,y}$

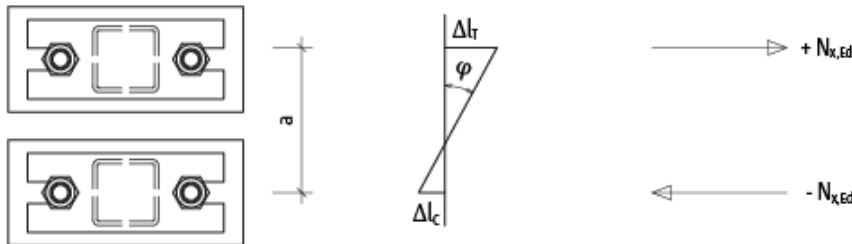


Figure 11. Deflection Calculation

$$\phi \approx \tan \phi = (\Delta l_T + \Delta l_C) / a$$

$$\phi \text{ [rad]} = M_y / C \text{ [rad]}$$

$\phi$  [rad]: angle of deflection  
 $M_y$  [kip\*ft]: moment on the connection for the ULS deflection calculation  
 $C$  [kip\*in/rad]: rotational stiffness  
 $a$  [in]: moment arm

Schöck Isokorb® Module	2 x S-D16	2 x S-D22
Rotational stiffness	C [kip*in/rad]	
Connection	416 *a <sup>2</sup>	611 *a <sup>2</sup>

Table 9. Rotational Stiffness

## Schöck Isokorb® T Type S

### Expansion joints/fatigue resistance

#### Horizontally movable connections

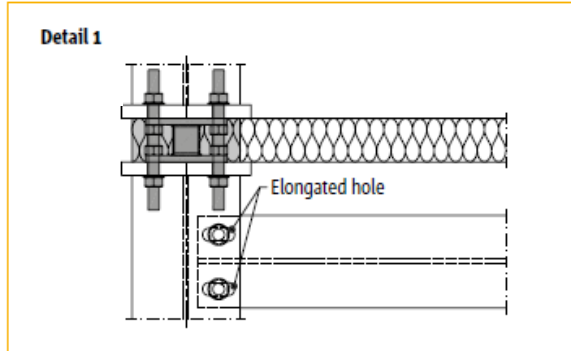


Figure 12. Slotted Connection for Thermal Movement

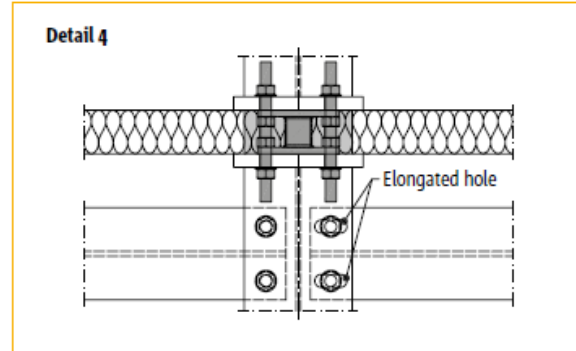


Figure 13. Expansion Joint by Slotted Connection

#### Effective deformation length $l_{eff}$

When using a thermal break for steel connections a steep temperature gradient is imposed at the building envelope between the interior and exterior steel structure. The interior structure under climate control is kept relatively stable and does not expand or contract significantly, while the exterior structure may undergo large temperature fluctuations. These temperature fluctuations can cause significant stress in the thermally broken connection and, if the stress is too large, can limit the fatigue life of the connection. To prevent this, a maximum length between connections before an expansion joint or other relief method is introduced ( $l_{eff}$ ).

This permitted effective deformation length is the maximum distance apart that two or more Schöck Isokorb® T Type S connections may be arranged if the structure connected to the modules cannot freely expand in length, thus leading to horizontal shifts in the Isokorb® modules.

#### Expansion joint length $l_{ex}$

This length covers the expansion joint spacing and can also be bigger than the effective deformation length

$$l_{eff} \leq l_{ex}$$

The permitted effective deformation length depends on:

- the design of the on-site end plate (high tolerances)
- the temperature differences
- the stiffness of the exterior steel structure

The definition and verification of these boundary condition lies with the Engineer of Record (EOR). Please feel free to contact our North American Design Department for further information.

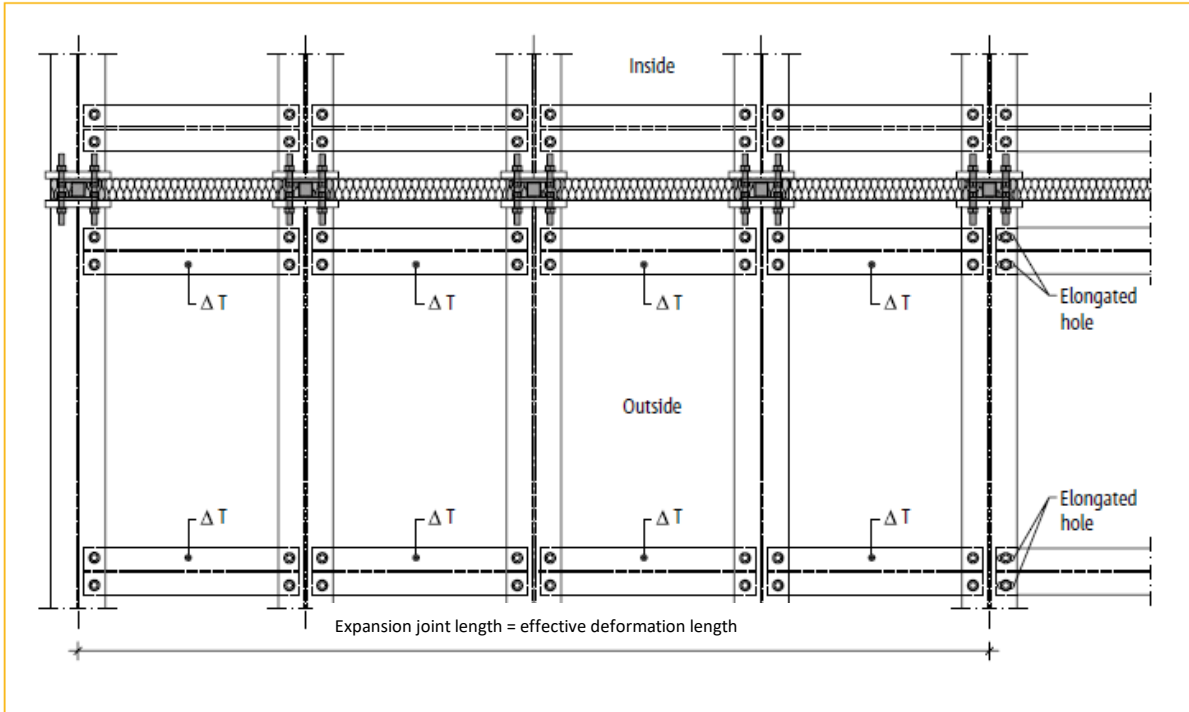


Figure 14. Expansion Joint Spacing (zero movement at central fixed point)

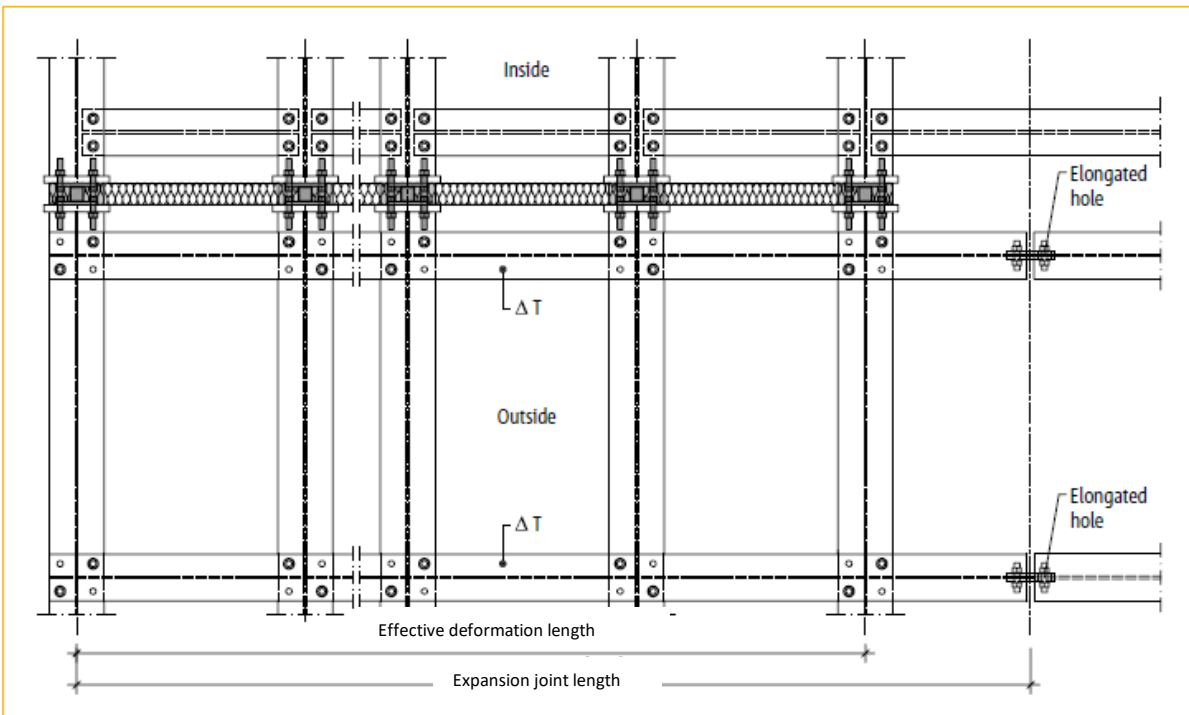


Figure 15. Expansion Joint Spacing Higher than Spacing of Effective Deformation Length

END OF DOCUMENT